

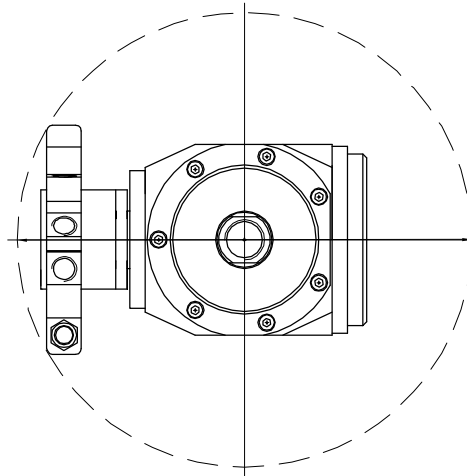


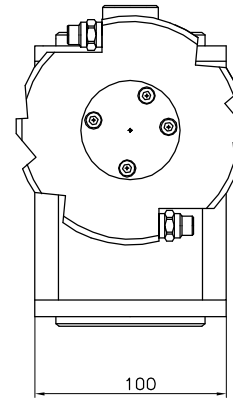


總代理

思沛雅噴霧器材有限公司

22205 新北市深坑區北深路三段270巷8號3樓 TEL. 02-8662-6968 FAX. 02-8662-6967  
Website : www.sprayernozzle.com.tw E-mail : sales@sprayernozzle.com.tw

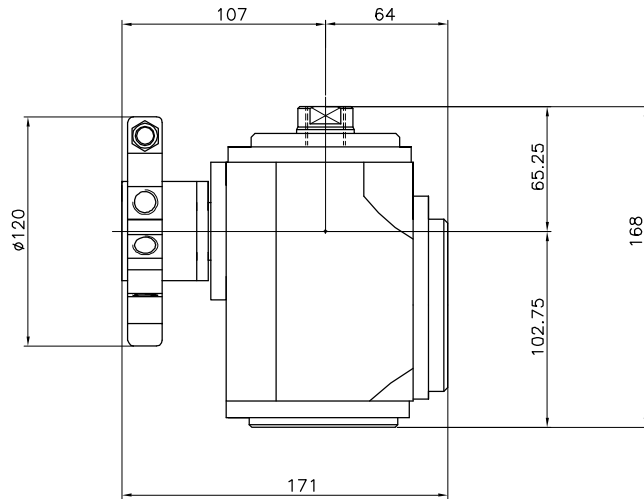

FORO DI PASSAGGIO MINIMO IN ASSE  $\phi 238$   
MIN. CENTER LINE THROUGH HOLE  $\phi 238$

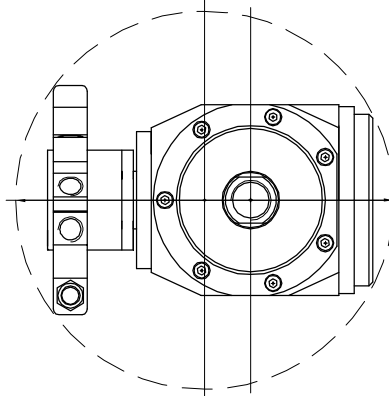

FORO DI PASSAGGIO MINIMO MANUALE  $\phi 198$   
MIN. MANUAL THROUGH HOLE  $\phi 198$

TECHNICAL DATA - 200 BAR VERSION

|                           |                                       |
|---------------------------|---------------------------------------|
| OPERATING FLOW RANGE      | 8 - 200 L/min                         |
| OPERATING PRESSURE RANGE  | 8 - 200 bar                           |
| MAX OPERATING TEMPERATURE | 90 °C                                 |
| WASHING CYCLE TIME        | 2'-12'                                |
| WATER INLET               | 1/2" G                                |
| NOZZLES POSITIONS         | 2 - 4                                 |
| NOZZLES THREAD            | 1/4"NPT                               |
| O.RING                    | NBR - EPDM                            |
| LUBRICANT                 | SILICON OIL VISCOSITY 20-100-350-5000 |
| MATERIAL                  |                                       |
| INOX AISI 316             | WEIGHT 10.5KG                         |
| ALUMINIUM                 | WEIGHT 5.5KG                          |

TECHNICAL DATA - 400 BAR VERSION

|                           |                                       |
|---------------------------|---------------------------------------|
| OPERATING FLOW RANGE      | 8 - 60 L/min                          |
| OPERATING PRESSURE RANGE  | 8 - 400 bar                           |
| MAX OPERATING TEMPERATURE | 90 °C                                 |
| WASHING CYCLE TIME        | 2'-12'                                |
| WATER INLET               | 1/2" G                                |
| NOZZLES POSITIONS         | 2 - 4                                 |
| NOZZLES THREAD            | 1/4"NPT                               |
| O.RING                    | NBR - EPDM                            |
| LUBRICANT                 | SILICON OIL VISCOSITY 20-100-350-5000 |
| MATERIAL                  |                                       |
| INOX AISI 316             | WEIGHT 10.5KG                         |
| ALUMINIUM                 | WEIGHT 5.5KG                          |

|                      |   |          |      |        |         |          |           |
|----------------------|---|----------|------|--------|---------|----------|-----------|
| RUGOSITA' (UNI 4600) | MODIFICA                                    | 1        | 2    | 3      | 4       | 5        |           |
|                      | FOGLIO                                      | XXXX     |      |        |         |          |           |
| GREZZO               | DATA  | XX.XX.XX |      |        |         |          |           |
|                      | TOLLERANZE GENERALI classe m UNI-EN 22768/1 | 0÷6      | 6÷30 | 30÷120 | 120÷400 | 400÷1000 | 1000÷2000 |
| SGROSS.              |   | ±0.1     | ±0.2 | ±0.3   | ±0.5    | ±0.8     | ±1.2      |
| FINITURA             | NOTE: VERSIONE 09                           |          |      |        |         |          |           |
| RETTIFICA            | MATERIALE:                                  |          |      |        |         |          |           |
|                      | DESCRIZIONE: FV020 DISEGNO DI APPLICAZIONE  |          |      |        |         |          |           |
|                      | FV020 APPLICATION DRAWING                   |          |      |        |         |          |           |

**Bolondi**  
CLEANING HEADS  
MONTECCHIO E. (RE) - ITALY

DISEGN.: CR CONTR.: DM  
DATA: 08.09.09 MOD.  
SCALA: 1:2 | A3 | 0

CODICE: FV020