


TECHNICAL DATA	
O.RING	NBR - EPDM - VITON
SLIPPER	PTFE+CARBON FIBRE
BUSHING	AISI 316
FILTER	700 MICRON
NOZZLES POSITIONS	2 - 4
NOZZLES THREAD	1/4"NPT (URACA TYPE N)
TESTING NOZZLES	0 x 0000
OPERATING FLOW RANGE	60 - 400 L/min
TESTING FLOW	00 L/min
OPERATING PRESSURE RANGE	5 - 400 bar
TESTING PRESSURE	000 bar
CENTER LINE MIN PASS THROUGH HOLE	140 mm
MANUAL MIN PASS THROUGH HOLE	120 mm
MAX OPERATING TEMPERATURE	90 °C
MATERIAL	INOX AISI 316
CONICAL GEARS	FIXED Z=71 ROTATING Z=73
MODULE	1
DIFFUSER SPEED SETTING OPENINGS	5
TESTING DIFFUSER OPENINGS	X/X/X/X/X
ROTATION SPEED	SEE CHART
FULL CYCLE	73 ROTATIONS
FULL CYCLE TIME	4.5 min AT 16 RPM
WEIGHT	12.6 KG


FLOW L/MIN	DIFFUSER OPENINGS				
	3	3/6	3/6/9	3/6/9/12	3/6/9/12/15
60	12				
90	16	9			
120	18	12			
150		16	9		
180		18	12		
210			16	9	
240			18	12	
270				16	9
300				18	12
330					16
360					18
400					22

SPINNING SPEED RPM

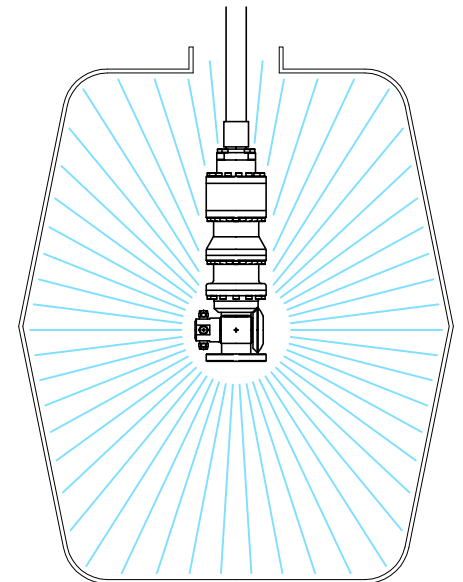

SPRAYER 總代理
思沛雅噴霧器材有限公司

RUGOSITA' (UNI 4600)	MODIFICA	1	2	3	4	5
FOGLIO	XXXX					
DATA	XX.XX.XX					
GREZZO	TOLLERANZE GENERALI classe m UNI-EN 22768/1					
~ = ✓	0±6	6±30	30±120	120±400	400±1000	1000±2000
SGROSS.	±0.1	±0.2	±0.3	±0.5	±0.8	±1.2
▽ = 3.2/						
FINITURA	MATERIALE: INOX AISI 316 + PEEK					
▽▽ = 1.6/						
RETTIFICA	DESCRIZIONE: INSTALLATION DRAWING MW 440A					
▽▽▽ = 0.8/						



Bokondi
CLEANING HEADS
MONTECCHIO E. (RE) - ITALY

DISEGN.: CR CONTR.: DM
 DATA: 11.06.12 MOD.
 SCALE: 1:1 A3 0
 CODICE: MW 440 A