




總代理

思沛雅噴霧器材有限公司

22205 新北市深坑區北深路三段270巷8號3樓 TEL. 02-8662-6968 FAX. 02-8662-6967

Website : www.sprayernozzle.com.tw E-mail : sales@sprayernozzle.com.tw

TECHNICAL DATA	
O.RING	EPDM-NBR
SLIPPER	PTFE+CARBON FIBER
NOZZLES POSITIONS	2-4
NOZZLES CIRCLE	ON REQUEST
NOZZLES SIZE	1/4"NPT
MAX FLOW	200 L/min
MAX PRESSURE	200 bar
MAX TEMPERATURE	90 °C
MATERIAL	INOX AISI 316
DIFFUSER OPENING	3/6/9/12
WEIGHT	7.1 KG

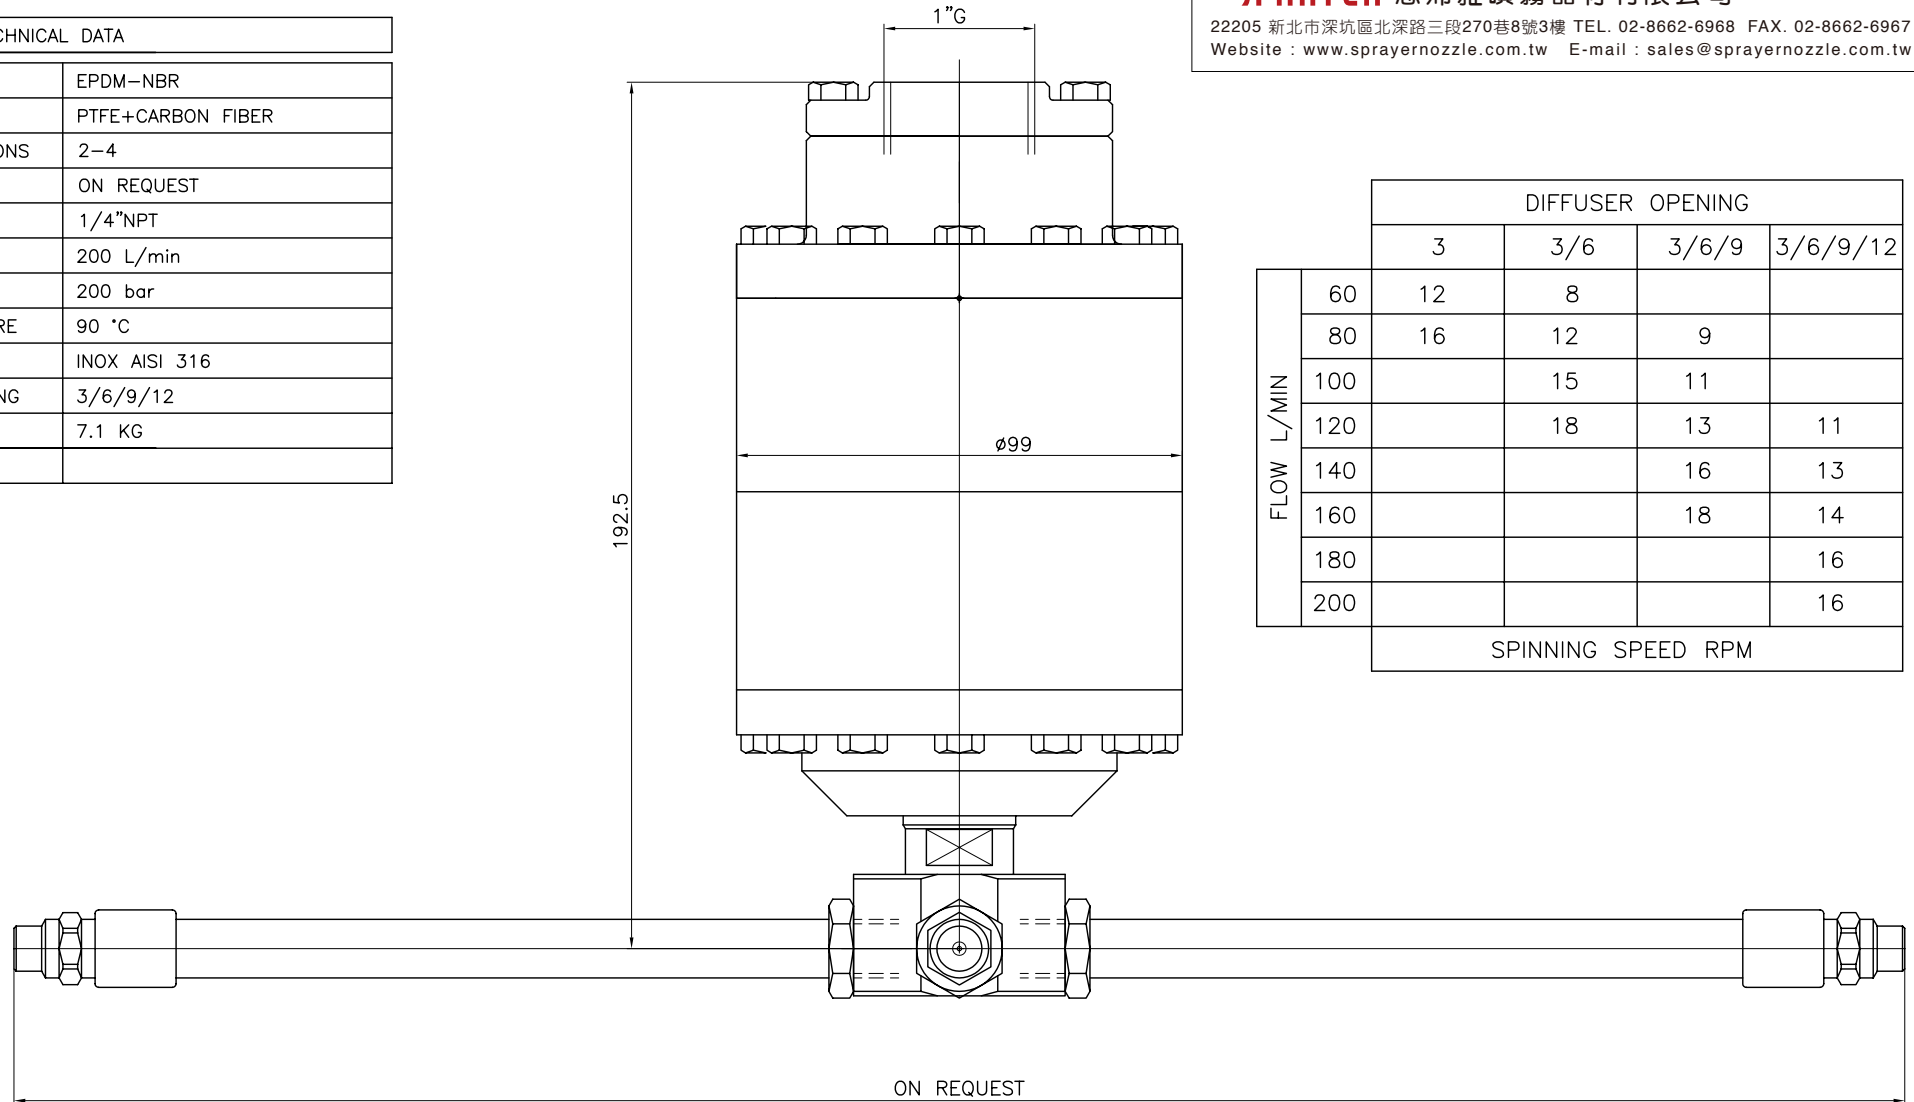

		DIFFUSER OPENING			
		3	3/6	3/6/9	3/6/9/12
FLOW L/MIN	60	12	8		
	80	16	12	9	
	100		15	11	
	120		18	13	11
	140			16	13
	160			18	14
	180				16
	200				16
SPINNING SPEED RPM					

RUGOSITA' (UNI 4600)	MODIFICA	1	2	3	4	5	 CLEANING HEADS MONTECCHIO E. (RE) - ITALY
	FOGLIO	xxxx					
	DATA	xx.xx.xx					
GREZZO	TOLLERANZE GENERALI classe m UNI-EN 22768/1						DISEGN.: CR CONTR.: DM DATA: 26.07.05 MOD.
	0±6	6±30	30±120	120±400	400±1000	1000±2000	
SGROSS	±0.1	±0.2	±0.3	±0.5	±0.8	±1.2	SCALA 1:1 A3 0
	NOTE: VERSION .05						
FINITURA	MATERIALE: STAINLESS STEEL						CODICE: PW 200-SL
RETTIFICA	DESCRIZIONE: APPLICATION DRAWING						