

TECHNICAL DATA	
O.RING	NBR - EPDM - VITON
SLIPPER	PTFE+CARBON FIBRE
BUSHING	AISI 316
FILTER	700 MICRON
NOZZLES POSITIONS	2 - 4
NOZZLES THREAD	1/8"NPT
TESTING NOZZLES	0 x 0000
OPERATING FLOW RANGE	10 - 60 L/min
TESTING FLOW	00 L/min
OPERATING PRESSURE RANGE	0 - 200 bar
TESTING PRESSURE	000 bar
CENTER LINE MIN PASS THROUGH HOLE	95 mm
MANUAL MIN PASS THROUGH HOLE	76 mm
PIPE LENGHT	1018 mm (STANDARD)
MAX OPERATING TEMPERATURE	90 °C
MATERIAL	INOX AISI 316
CONICAL GEARS	FIXED Z=29 ROTATING Z=31
MODULE	1
ROTATION SPEED RANGE	15 TO 25 RPM
FULL CYCLE	31 ROTATIONS
FULL CYCLE TIME	1.5 min AT 20 RPM

BE0030 DN 65
DIN 11851-52 NUT


BE0011 DN 65
DIN 11851-52 FLANGE


BE0032 DN 80
DIN 11851-52 NUT

BE0010 DN 80
DIN 11851-52 FLANGE

BE0014 3"
TRI-CLAMP FLANGE

BE0015 4"
TRI-CLAMP FLANGE

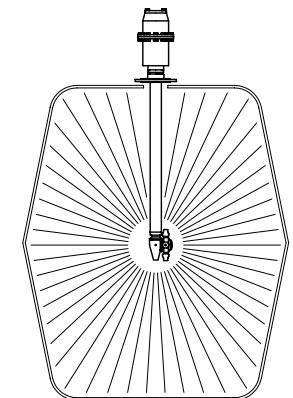

RUGOSITA' (UNI 4600)	MODIFICA	1	2	3	4	5	 CLEANING HEADS MONTECCHIO E. (RE) - ITALY
	FOGLIO DATA	XXXX					
GREZZO	TOLLERANZE GENERALI classe m UNI-EN 22768/1						
SGROSS.	0÷6 ±0.1	6÷30 ±0.2	30÷120 ±0.3	120÷400 ±0.5	400÷1000 ±0.8	1000÷2000 ±1.2	
FINITURA	DESCRIZIONE: XC 061 AAH APPLICATION DRAWING						
RETTIFICA							

DISEGN.: CR	CONTR.: DM
DATA: 02.10.08	MOD.
SCALA: 1:3	A3 0
CODICE: XC 061 AAH	